




Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Yolo


PD-55718

FEATURES

- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Twist-lock glass diffuser
- Three 12" and one 6" down rods included (additional sold separately)
- Universal voltage driver (120V-220V-277V) installs within junction box (18" and 26" sizes only)
- No transformer or driver needed (35" only)
- 277v option available (35" only)
- Slope ceiling adaptable. Hang straight swivel.
- CEC Title 24 compliant (35" size only)

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277V, 50/60Hz
Driver Dimension	2.8" x 1.3" x 1.2"
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Metal body and Twist lock glass diffuser

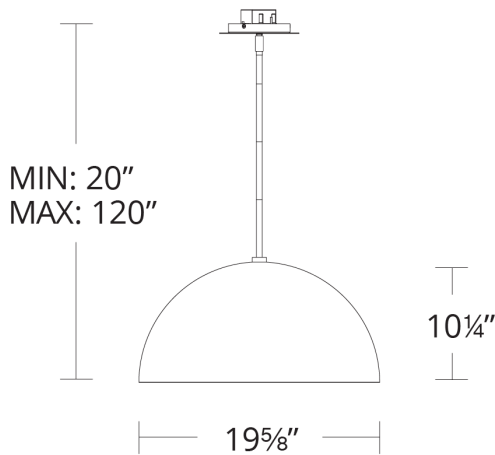

PD-55718

REPLACEMENT PARTS

- RPL-GLA-55718-GL - Glass
- RPL-GLA-55718-SL - Glass
- ROD-I06-D127-KRBZ - 6" Rod - GL finish
- ROD-I06-D127-KRWT - 6" Rod - SL finish
- ROD-I12-D127-KRBZ - 12" Rod - GL finish
- ROD-I12-D127-KRWT - 12" Rod - SL finish

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
PD-55718 20"	3000K 90	GL Gold Leaf/Dark Bronze	23W	120-277V	2000	809
	3000K 90	SL Silver Leaf/White	23W	120-277V	2000	809

Example: **PD-55718-SL**

For custom requests please contact customs@modernforms.com




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Yolo

PD-55726

PRODUCT DESCRIPTION

Clean, contemporary, the YOLO pendant is imbued with a large spun-metal dome. Luxuriously hand applied leaf finish. Beautiful warm ambient lighting.

FEATURES


- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Twist-lock glass diffuser
- Three 12" and one 6" down rods included (additional sold separately)
- Universal voltage driver (120V-220V-277V) installs within junction box (18" and 26" sizes only)
- No transformer or driver needed (35" only)
- 277v option available (35" only)
- Slope ceiling adaptable. Hang straight swivel.
- CEC Title 24 compliant (35" size only)

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Driver Dimension	2.8" x 1.3" x 1.2"
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Metal body and Twist lock glass diffuser

REPLACEMENT PARTS

- RPL-GLA-55726-GL - Glass
- RPL-GLA-55726-SL - Glass
- ROD-I06-D127-KRBZ - 6" Rod - GL finish
- ROD-I06-D127-KRWT - 6" Rod - SL finish
- ROD-I12-D127-KRBZ - 12" Rod - GL finish
- ROD-I12-D127-KRWT - 12" Rod - SL finish

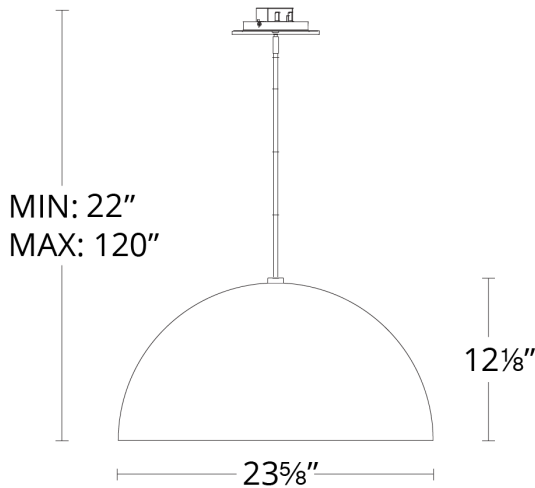

PD-55726

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
PD-55726 24"	3000K 90	GL Gold Leaf/Dark Bronze	25.1W	120-277V	2400	888
	3000K 90	SL Silver Leaf/White	25.1W	120-277V	2400	888

Example: **PD-55726-SL**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Yolo

PD-55735

PRODUCT DESCRIPTION

Clean, contemporary, the YOLO pendant is imbued with a large spun-metal dome. Luxuriously hand applied leaf finish. Beautiful warm ambient lighting.

FEATURES


- 277V option available for special order.
- ACLED driverless technology
- Twist-lock glass diffuser
- Three 12" and one 6" down rods included (additional sold separately)
- Universal voltage driver (120V-220V-277V) installs within junction box (18" and 26" sizes only)
- No transformer or driver needed (35" only)
- 277v option available (35" only)
- Slope ceiling adaptable. Hang straight swivel.
- CEC Title 24 compliant (35" size only)
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Aluminum body and Twist lock glass diffuser

REPLACEMENT PARTS

- RPL-GLA-55735-GL - Glass
- RPL-GLA-55735-SL - Glass
- ROD-I06-D15-KRBZ - 6" Rod - GL finish
- ROD-I06-D15-KRWT - 6" Rod - SL finish
- ROD-I12-D15-KRBZ - 12" Rod - GL finish
- ROD-I12-D15-KRWT - 12" Rod - SL finish

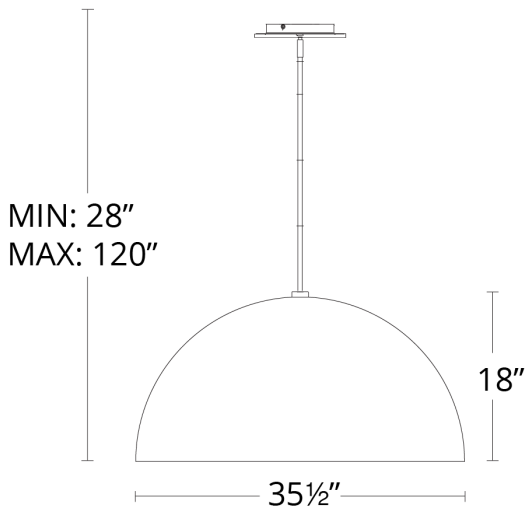

PD-55735

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
PD-55735 35"	3000K 90	GL Gold Leaf/Dark Bronze	39.9W	120 VAC	2864	1174
	3000K 90	SL Silver Leaf/White	39.9W	120 VAC	2864	1174

Example: **PD-55735-SL**

•For 277V special order, add an "F" before the finish: PD-55735F-SL

For custom requests please contact customs@modernforms.com