



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Dawn

WS-W2216

**PRODUCT DESCRIPTION**


From dusk to dawn, there's no better expression of modern minimalism than this outdoor sconce, an elegantly curved geometric form with a bold cutout window. Powered by energy-efficient LEDs, bright indirect light is perfect for creating architectural accents and illuminated pathways.

**FEATURES**

- 277V option available for special order.
- ACLED driverless technology
- Glass diffuser
- Indirect and downward illumination
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

**SPECIFICATIONS**

Rated Life	50000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	85
Construction	Aluminum hardware, glass diffuser

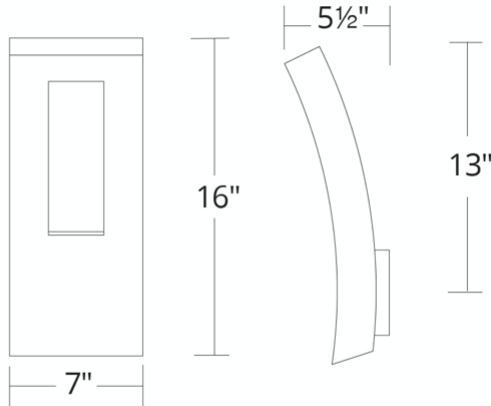

WS-W2216

**REPLACEMENT PARTS**

- RPL-GLA-2216 - Glass
- HDW-WS-W22XX-BZ - Hardware Pack - BZ finish

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W2216 16"	3000K	BK Black	17W	960	617
	3000K	BZ Bronze	17W	960	617

Example: **WS-W2216-BZ**

•For 277V special order, add an "F" before the finish: WS-W2216F-BK

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Dawn

WS-W2223

**PRODUCT DESCRIPTION**

From dusk to dawn, there's no better expression of modern minimalism than this outdoor sconce, an elegantly curved geometric form with a bold cutout window. Powered by energy-efficient LEDs, bright indirect light is perfect for creating architectural accents and illuminated pathways.

**FEATURES**


- 277V option available for special order.
- ACLED driverless technology
- Glass diffuser
- Indirect and downward illumination
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

**SPECIFICATIONS**

Rated Life	50000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	85
Construction	Aluminum hardware, glass diffuser

**REPLACEMENT PARTS**

- RPL-GLA-2223 - Glass
- HDW-WS-W22XX-BZ - Hardware Pack - BZ finish

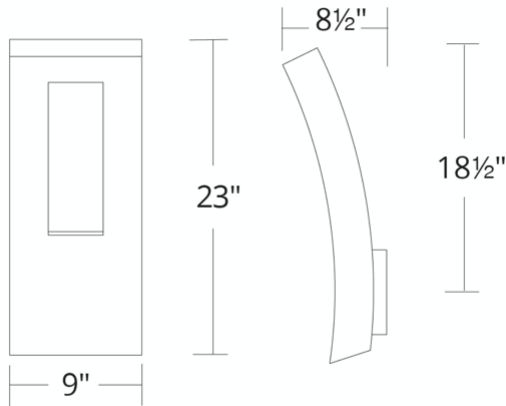

WS-W2223

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W2223 23"	3000K	BK Black	26W	1440	912
	3000K	BZ Bronze	26W	1440	912

Example: **WS-W2223-BZ**

•For 277V special order, add an "F" before the finish: WS-W2223F-BK

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)