


# SKYLARK

## FR-W2202-54L

54" Ceiling Fan

# MODERN FORMS SMART FANS

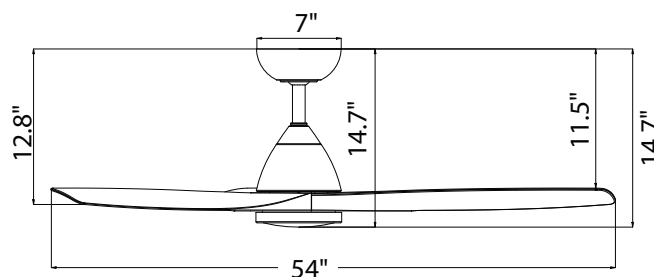

### PRODUCT DESCRIPTION

Introduce sleek sophistication to your home with the new Skylark Smart Fan. Spectacular new finishes of soft brass and brushed nickel are unveiled in our Modern Forms Smart Fan collection. Also debuting is the ebony finish which features a new weathered look. The three smartly designed blades circulate air with an agile yet robust gracefulness, bringing incomparable comfort and illumination with an integrated LED luminaire, throughout your space. The convenient, 6-speed set-up can be controlled locally using the included Bluetooth remote control or remotely using the Modern Forms app.

### FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor LED
- Luminaire included - no cover available
- Includes remote control
- Optional wall control sold separately
- Compatible with Modern Forms app

### AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	3871/6041
Weighted-Average/High Energy Use (W):	20/28
Estimated Yearly Energy Cost (\$):	6
Weighted-Average/High Efficiency (CFM/W):	191
Max RPM:	162

### ORDER NUMBER

Model	Housing	Blade
FR-W2202-54L	BN	EB
FR-W2202-54L	MB	MB
	SB	MB
	SB	MW
	MW	MW

Example: FR-W2202-54L-MB

\*Range may vary based on application and surroundings.

\*This fan comes uni-pack - blade select options are not available.

\*Brushed Nickel and Soft Brass are not intended for coastal environments.

The Modern Forms app synchronizes seamlessly with smart home devices you already own



### SPECIFICATIONS

<b>Construction:</b>	Aluminum, Steel, ABS
<b>Blade:</b>	14° Pitch, 54" sweep
<b>Downrod:</b>	.75" O.D. x 4.5H included
<b>Mounting Slope:</b>	Up to 30°
<b>Wire:</b>	80"
<b>Hanging Weight:</b>	17 lbs.
<b>Total Power:</b>	48W
<b>Standards:</b>	UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star
<b>Motor Type:</b>	120 x D-15 sensorless DC motor

### WIRELESS PERFORMANCE

<b>Wi-Fi Range:</b>	Up to 150 ft*
<b>Bluetooth Range:</b>	Up to 150 ft*

### LUMINAIRE PERFORMANCE

<b>Light Source:</b>	LED
<b>Light Wattage:</b>	19.5W
<b>Lumens/ Delivered Lumens:</b>	1600/1079
<b>Dimming:</b>	Integrated
<b>CRI:</b>	90
<b>CCT Color Temperature:</b>	3000K (2700K/4000K/5000K selectable)
<b>Rated Life:</b>	50,000 hours

ModernForms.com  
Phone (866) 810-6615  
Fax (800) 526-2585






Headquarters, East  
44 Harbor Park Drive  
Port Washington, NY 11050

South East Manufacturing Facility  
1600 Distribution Ct  
Lithia Springs, GA 30122

Central Manufacturing Facility  
1700 South J Elmer Freeway, Ste 100  
Cedar Hill, TX 75104

West Manufacturing Facility  
1750 S Archibald Ave  
Ontario, CA 91761

### OPTIONAL ACCESSORIES

Bluetooth Wall Control		<b>F-WCBT</b>	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control		<b>F-RCBT</b>	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		<b>XF-12</b> 12IN <b>XF-18</b> 18IN <b>XF-24</b> 24IN <b>XF-36</b> 36IN <b>XF-48</b> 48IN <b>XF-60</b> 60IN <b>XF-72</b> 72IN		All our downrods are .75" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		<b>XF-I</b>		Connects two downrods together.
Sloped Ceiling Kit		<b>XF-SCK</b>		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-BN**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

### SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

### SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire